




Everything is becoming more expensive, everything is becoming a little more difficult. And for that very reason Yamaha has now built a motorcycle which not only offers a great deal of satisfaction,


but also keeps an eye on your pocketbook: the RS. You can solve today's commuting problems with sporting looks and style. Week days dash work, weekends dash leisure. The RS offers all the ease

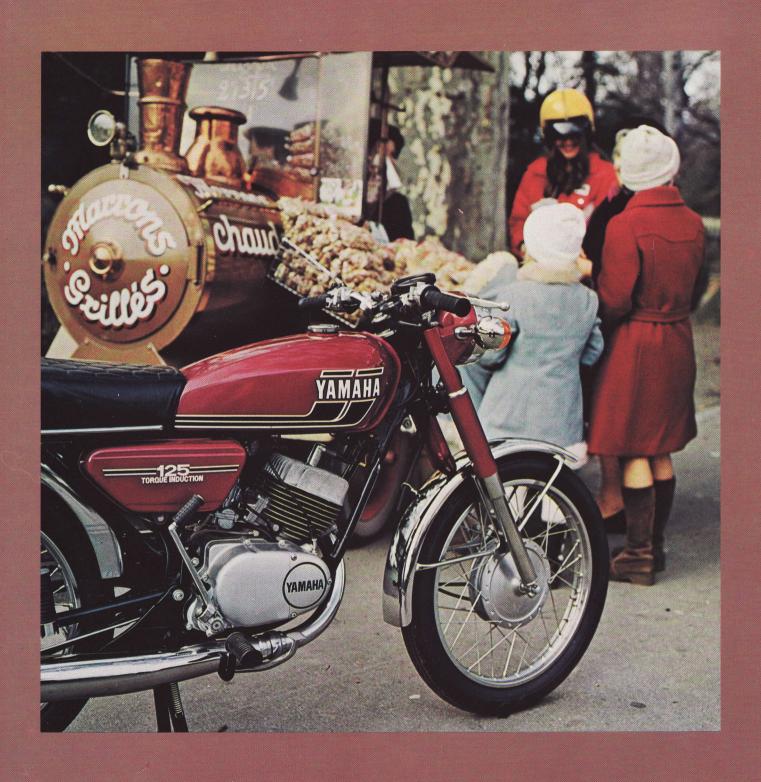

Brakes: Emergency stop, slowing down; both can be done with equal confidence. Aluminium single leading shoe drumbrakes in front- and rearwheel give rapid heat-dissipation. The brakes are designed with double ridge sealing, ensuring they are water- and dust-proof under all conditions.

Seat:
The Yamaha seat is designed for maximum comfort with one or two people, for long or short trips. The lockable seat, incorporating the helmet-lock, gives easy access for service including oiltank, tools, battery.

and pleasure you could want from an adult motorcycle. No more traffic jams and irritation on Yamaha's Problemless. Only satisfaction. Yamaha's RS, tomorrow's motorcycle at yesterday's

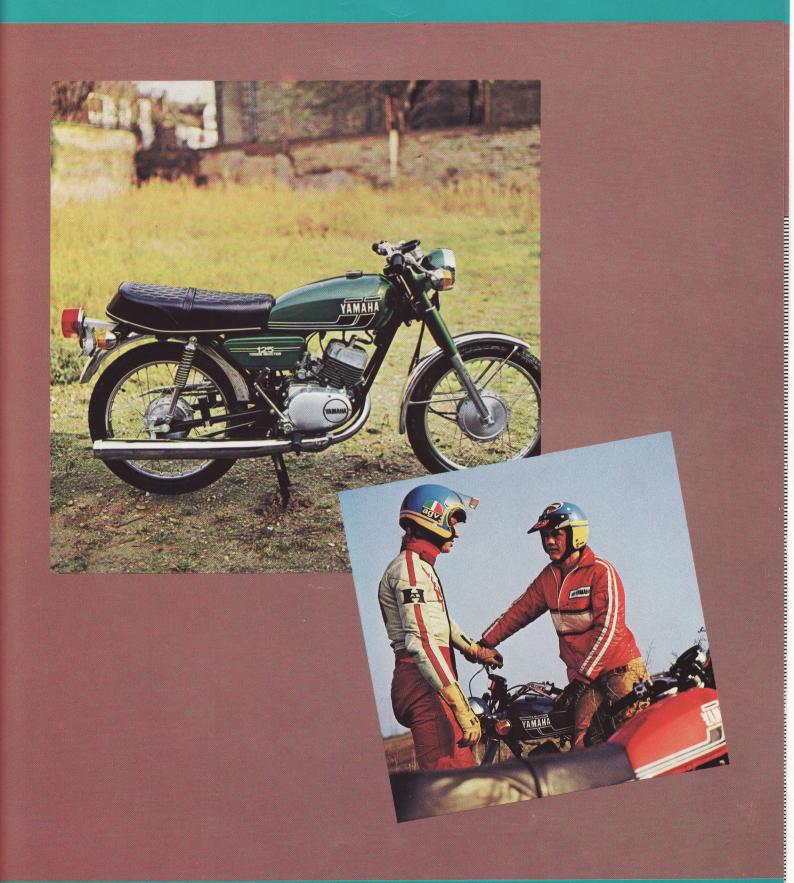

Torque induction:
To ensure the efficient performance of a motor, it is of the utmost importance that the petrol-air-mixture is fed into the cylinders at the right moment. With Yamaha's two-strokes the fuel-supply is controlled by Yamaha's "reed-valve torque-induction" system. Torque induction ensures that all fuel is fully used, giving more power at low engine-speeds and greatly improved economy.

Gearbox:
The power your engine develops, is transmitted by a 5-speed gearbox to the backwheel. The Yamaha constant-mesh gearbox has 5 ratio's, selected in such a way that the engine is allowed to give its best performance under all conditions. Effortless gear-changing gives you performance and economy.

Autolube:
With most two-stroke engines,
the lubricating oil is mixed with petrol.
Yamaha's Autolube system removes the need
to premix fuel and oil in the gastank.
Autolube is a separate oil-injectionpump,
controlled by the twistgrip, injecting oil into
the induction-port at exactly the right time
and at exactly the right quantity required by
the engine. Never too much, never too little.
You will never spend too much money on oil,
and your engine has a longer life.

SPECIFICATIONS

PERFORMANCE max. speed range min. turning radius ENGINE type

displacement

94/120 km/h 2000 mm

2-stroke, air-cooled, reed valve, single cylinder, forward leaning 97/123 cc

bore & stroke compression ratio max. horsepower (DIN)

max. torque

lubrication system starting system transmission

52x45.6/56x50 mm 6.7/6.9 : 1

11/12.5 HP at 8000 RPM 1.01/1.15 KGM at 7500 RPM autolube kick starter 5-speed gearbox

DIMENSIONS

overall length
overall width
overall height
wheelbase
min. ground
clearance
weight: net
fuel tank capacity
oil tank capacity
tires: front
rear

1870 mm 775/595 mm 1035/945 mm 1205 mm

150 mm 98/101 kg 9.0 l. 1.5 l. 2.75-18-4PR 2.75-18-4PR





Engine:
The single cylinder two-stroke engine has been developed by Yamaha, by years of research, into a motor that is exceptionally strong, reliable and above all, economical.

Instruments:
The illuminated instrument-lay-out is designed to give information at a glance. Speedometer, ignition/neutral indicator.

production: korpzės, amsterdam, holland. printed by boom-ruygrok, haarlem, holland. thanks to: Levi's (Jeans) and Di.W.S. (helmets)